SUB·ZERO

BI-36F/S

FEATURES

Monitor and control remotely with Wi-Fi connectivity

Locks in cold air to ensure freshness with magnetic door seals

Controls temperature within one degree of setpoint

Filters ice, removing contaminants, chlorine taste, and odor

Yields ice automatically and "max ice" for additional production

Ensures excellent visibility with bright lights

ACCESSORIES

90° Door Stop

Legacy 45 3/16" Pro Handle

Legacy Dual Install Kit with 72" Pro Louvered Grille

Legacy Dual Installation Kit

Legacy Dual Installation Kit with 66" Pro Louvered Grille

Legacy Grille Frame - 84"

Legacy Stainless Steel Kickplate - Left Hinge

Legacy Stainless Steel Kickplate - Right Hinge

Legacy Stainless Steel Pro Louvered Grille - 84"

Legacy Stainless Steel Side Panel

Legacy Tubular Handle

Stainless Steel Pro Louvered Grille - 83"

Stainless Steel Pro Louvered Grille - 88"

Water Filter

White Side Panel

Dual Installation Kit with Dual Wide Grille

Stainless Steel Pro Handles

Stainless Steel Tubular Handles

Accessories are available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

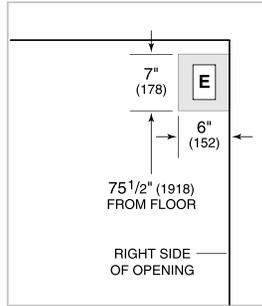## HANDLE OPTIONS

PRO

TUBULAR

PRODUCT DETAILS

FREEZER

• LED freezer lights

• 4 stainless-steel freezer shelves (3 adjustable; 1 stationary)

• 3 storage drawers with adjustable dividers

• 5 adjustable door bins

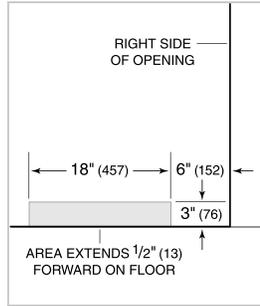• Automatic ice maker with removable ice container

PRODUCT SPECIFICATIONS

Model	BI-36F/S
Dimensions	36"W x 84"H x 24"D
Freezer Capacity	22.6 cu. ft.
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	35–120 psi
Receptacle	3-prong grounding-type

ELECTRICAL

7" (178)
6" (152)
75 1/2" (1918) FROM FLOOR
RIGHT SIDE OF OPENING

PLUMBING

RIGHT SIDE OF OPENING
18" (457)
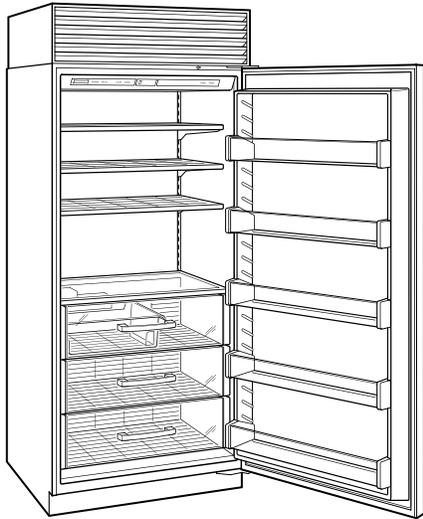6" (152)
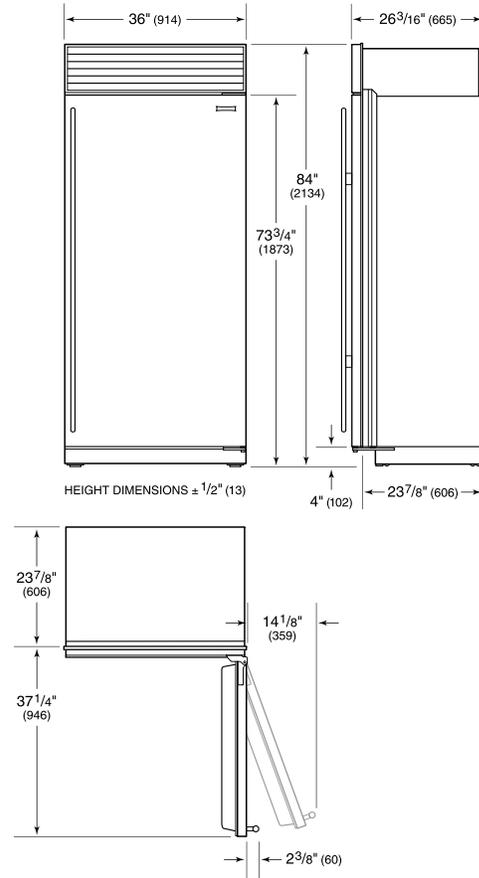3" (76)
AREA EXTENDS 1/2" (13) FORWARD ON FLOOR

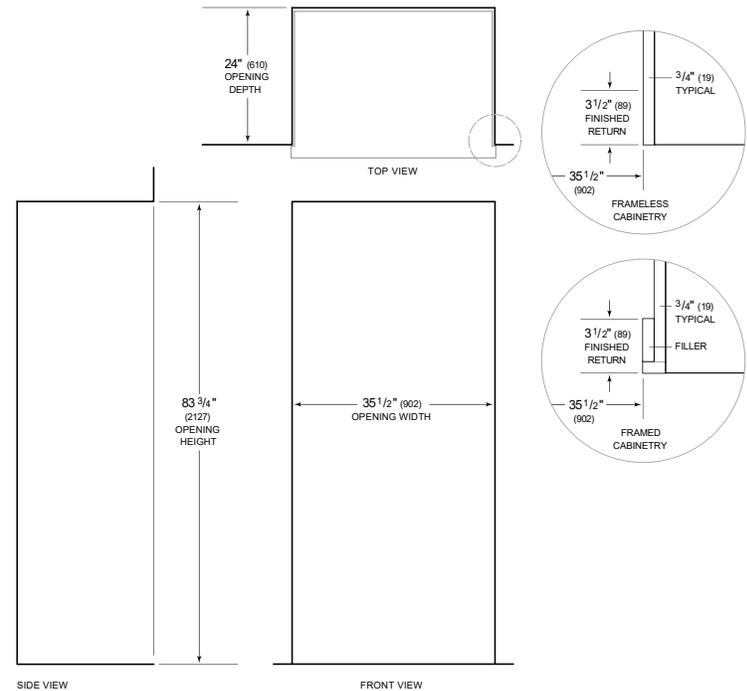**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

36" (914)
26 3/16" (665)
84" (2134)
73 3/4" (1873)
HEIGHT DIMENSIONS ± 1/2" (13)
4" (102)
23 7/8" (606)

23 7/8" (606)
14 1/8" (359)
37 1/4" (946)
2 3/8" (60)

STANDARD INSTALLATION

24" (610) OPENING DEPTH
TOP VIEW

3/4" (19) TYPICAL
3 1/2" (89) FINISHED RETURN
35 1/2" (902)
FRAMELESS CABINETRY

3/4" (19) TYPICAL
3 1/2" (89) FINISHED RETURN
FILLER
35 1/2" (902)
FRAMED CABINETRY

83 3/4" (2127) OPENING HEIGHT
35 1/2" (902) OPENING WIDTH

SIDE VIEW
FRONT VIEW

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry
Shaded line represents profile of unit.