

DF304



## FEATURES

- Dual convection oven for faster, more consistent cooking
- 10 cooking modes make meals easy
- Dual-stacked burners produce up to 20,000 Btu
- Burners capable of delivering less than 300 Btu for premier simmer performance
- Cobalt blue porcelain interior
- Exclusive pivoting control panel
- Continuous cast-iron grates for easy movement of pots and pans
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Spark ignition system re-ignites if flame goes out
- Heavy-gauge stainless steel
- Red, black or stainless steel control knobs
- Temperature probe cooks to ideal doneness and lets you know when it's ready
- Self clean, delayed start, timed cook, Sabbath mode and more

## ACCESSORIES

- 2-Burner Wok Grate
- 30" Bake Stone Kit
- 30" Broiler Pan
- 30" Dual Fuel and Induction Range Kickplate
- 30" Full-Extension Oven Rack
- Center S-Grate
- Dehydration Kit
- Filler Trim
- Oven Rack Set (3)
- Premier Baking Sheet
- S-Grates
- Temperature Probe
- Stainless steel, brass or chrome bezels
- 5" and 10" stainless steel risers, and 20" riser with shelf
- Front Leg Extension Covers
- Signature red, black or stainless steel control knobs
- Rear Caster Covers


Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## KNOB OPTIONS



## TOP CONFIGURATION



## RANGETOP SPECIFICATIONS


- 1 - 9,200 Btu Burner
- 1 - 15,000 Btu Burner
- 1 - 18,000 Btu Burner
- 1 - 20,000 Btu Burner

**PRODUCT SPECIFICATIONS**

Model	DF304
Dimensions	29 7/8"W x 36 7/8"H x 29 1/2"D
Oven 1 Usable Capacity	2.8 cu. ft.
Oven 1 Overall Capacity	4.5 cu. ft.
Door Clearance	19 1/2"
Weight	325 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female


**ELECTRICAL**

**GAS**

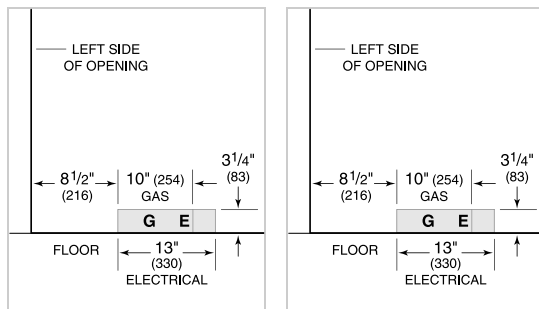


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

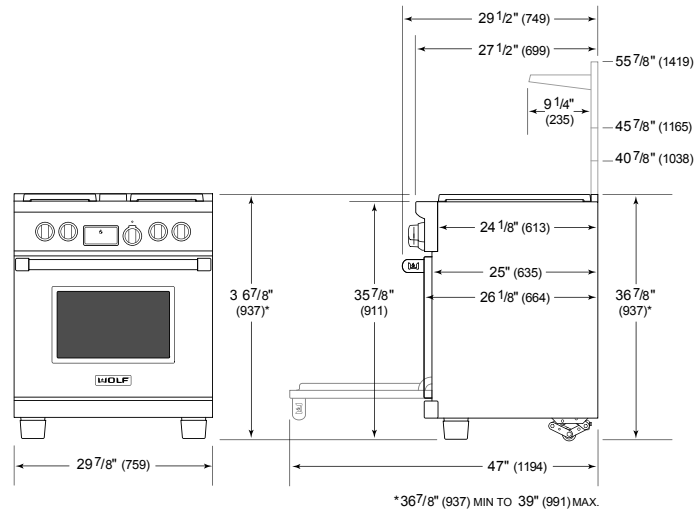

**STANDARD INSTALLATION**

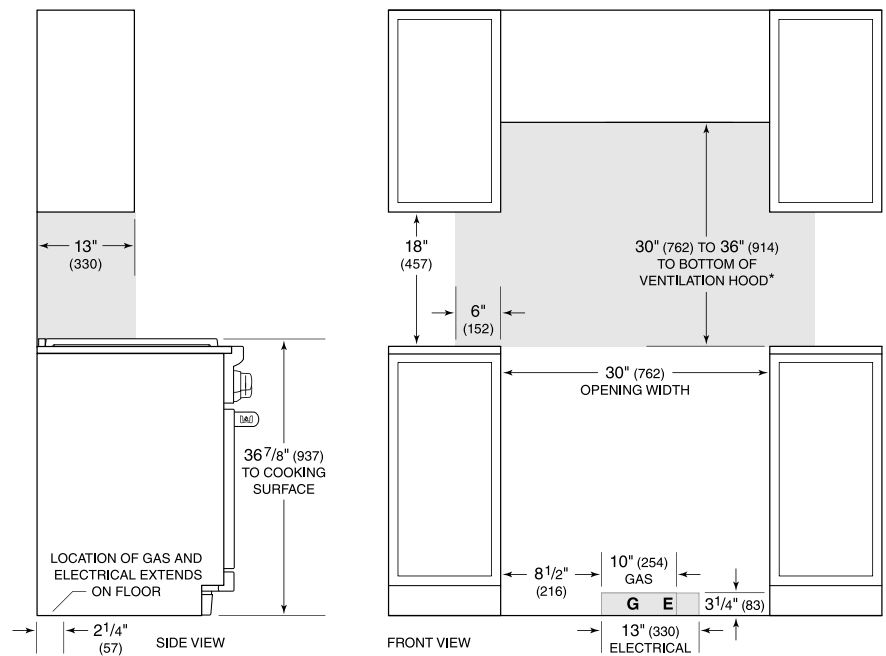

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials.

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.