

DF484DG



FEATURES

Cook at higher highs and lower lows with four dual-stacked, sealed burners that produce up to 20,000 Btu and deliver as low as 300 Btu

Rely on two 7,500 Btu infrared double griddle to sear burgers, stir-fry vegetables, and more

Clean up splashes and spills easily with the seamless, sealed, black porcelain-coated burner pans

Assures predictably delicious results with a variety of modes including Convection Roast, Proof, and Dehydrate

Control heat and airflow expertly as dual convection creates just the right cooking environment for everything from Cornish hens to cherry pie to butternut squash

Operate easily with a control panel that rotates out of sight when not in use

Leave nothing to chance. Our temperature probe alerts you when your dish has reached the desired temperature for worry-free, delicious results

Includes options such as self-clean, delayed start, timed cook, Sabbath mode, and more

Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety

Move pots and pans effortlessly across the continuous cast-iron grates

Find your kitchen style with a choice of iconic red, black, or brushed stainless control knobs

See food clearly with bright interior halogen lights and large double-panel glass door windows

ACCESSORIES

18" Broiler Pan

18" Dehydration Kit

18" Full-Extension Oven Rack

18" Standard Oven Racks

2-Burner Wok Grate

22" Cutting Board

3 1/4" Front Leg Covers

3 1/4" Rear Caster Covers

3 3/4" (95) Front Leg Covers

3 3/4" Rear Caster Covers

30" Bake Stone Kit

30" Broiler Pan

30" Full-Extension Ball-Bearing Oven Rack

4 1/4" Front Leg Covers

4 1/4" Rear Caster Covers

4 3/4" Front Leg Covers


4 3/4" Rear Caster Covers



KNOB OPTIONS



TOP CONFIGURATION

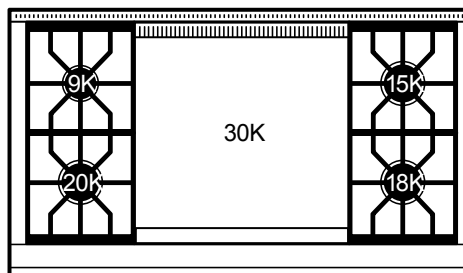

RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 1 - 20,000 Btu burner
- Stainless-steel island trim riser included
- 1 - 15,000 Btu burner
- 1 - 18,000 Btu burner
- 1 - 30,000 Btu Double Griddle
- Stainless-steel griddle cover

48" Stainless Steel Kickplate

48" and 60" Black Knobs

48" and 60" Red Knobs

48" and 60" Stainless Steel Knobs

Dehydration Kit

Filler Trim

Griddle Cleaning Kit

Griddle Cleaning Pads

Griddle Cleaning Solution

Oven Rack Set (3)

Premier Baking Sheet

Temperature Probe

Stainless steel, brass or chrome bezels

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer.

For local dealer information, visit subzero-wolf.com/locator.


Specifications are subject to change without notice. This information was generated on September 27, 2021. Verify specifications prior to finalizing your cabinetry/enclosures.



PRODUCT SPECIFICATIONS


| | |
|----------------------------|--------------------------------|
| Model | DF484DG |
| Dimensions | 47 7/8"W x 36 7/8"H x 29 1/2"D |
| Oven 1 Interior Dimensions | 14"W x 16 1/2"H x 19"D |
| Oven 2 Interior Dimensions | 25"W x 16 1/2"H x 19"D |
| Oven 1 Usable Capacity | 1.5 cu. ft. |
| Oven 1 Overall Capacity | 2.5 cu. ft. |
| Oven 2 Usable Capacity | 2.8 cu. ft. |
| Oven 2 Overall Capacity | 4.5 cu. ft. |
| Door Clearance | 19 1/2" |
| Electrical Supply | 240/208 VAC, 60 Hz |
| Electrical Service | 50 amp dedicated circuit |
| Gas Supply | 3/4" ID line |
| Gas Inlet | 1/2" NPT female |

DIMENSIONS

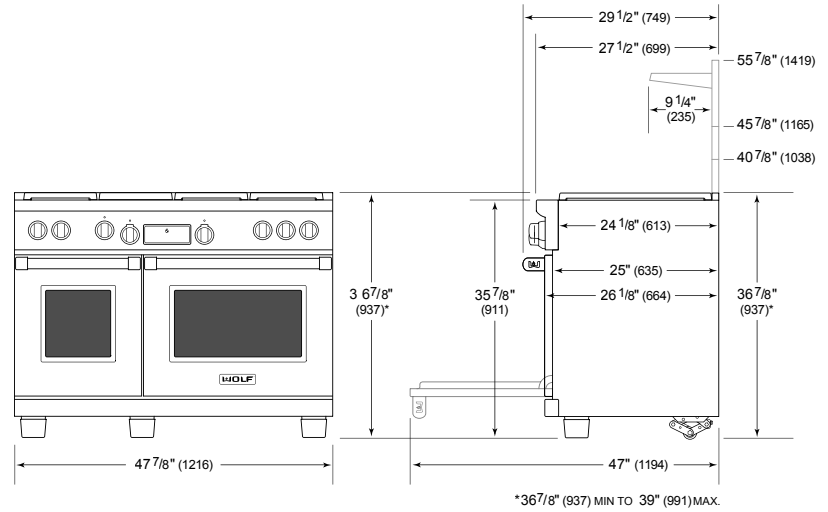


ELECTRICAL

GAS

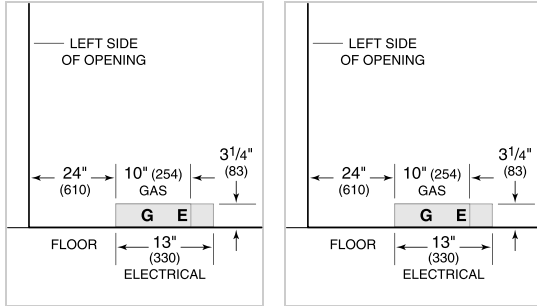

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

STANDARD INSTALLATION

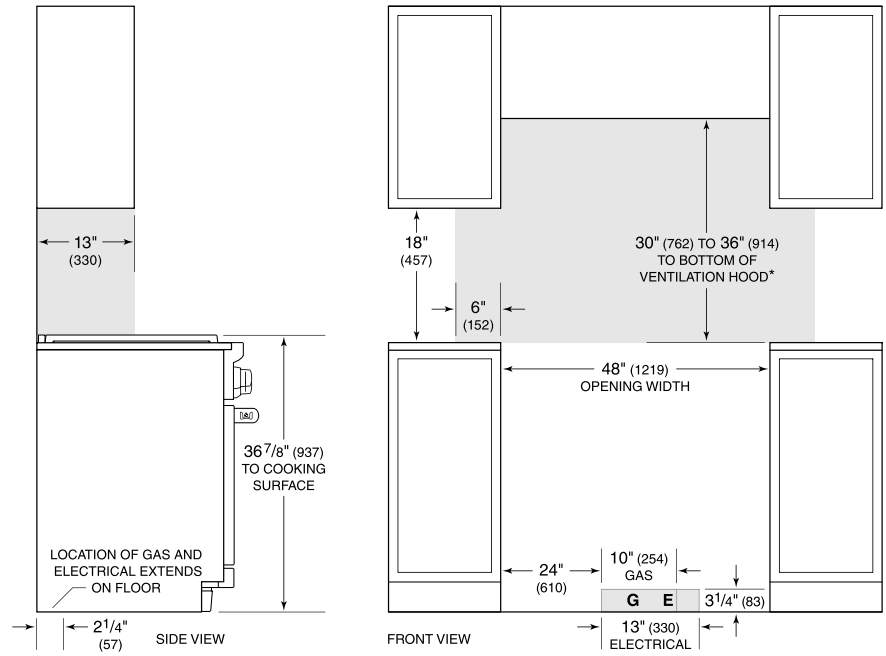

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charcoal.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.