

GR606CG



### FEATURES

- 6 dual-stacked burners plus 16,000 Btu charbroiler and 15,000 Btu griddle
- Convection oven for faster, more consistent cooking
- Infrared broiler inside oven sears quickly and evenly
- Dual-stacked, sealed burners for higher highs, lower lows
- Heavy-gauge stainless steel
- Continuous cast-iron grates for easy movement of pots and pans
- Enhanced views into oven
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Spark ignition system re-ignites if flame goes out
- Adjustable legs for stability, plus rear casters

### ACCESSORIES

- 11" Cutting Board
- 2-Burner Wok Grate
- Bake Stone Kit
- Filler Trim
- Front Leg Covers
- Full-Extension Ball Bearing Rack
- Griddle Cleaning Pads
- Griddle Cleaning Kit
- Griddle Cleaning Solution
- S-Grates
- Stainless Steel Kickplate
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Signature red, black or stainless steel control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



### KNOB OPTIONS



### TOP CONFIGURATION

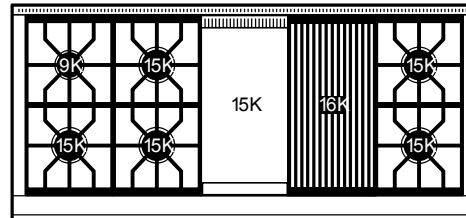

### RANGETOP SPECIFICATIONS


- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners
- 16,000 Btu Charbroiler
- 1 - 15,000 Btu (13,000 Btu LP) Griddle

**PRODUCT SPECIFICATIONS**

Model	GR606CG
Dimensions	60 1/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 2 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	2.9 cu. ft.
Oven 1 Overall Capacity	4.4 cu. ft.
Oven 2 Usable Capacity	2.9 cu. ft.
Oven 2 Overall Capacity	4.4 cu. ft.
Door Clearance	19 1/2"
Weight	950 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


**ELECTRICAL**

**GAS**

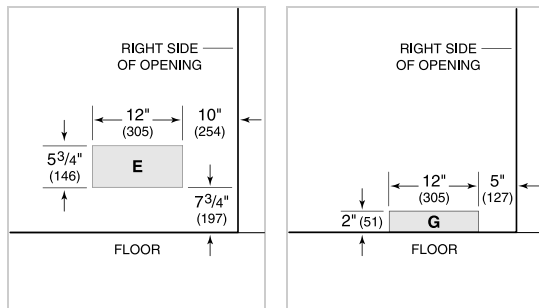


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

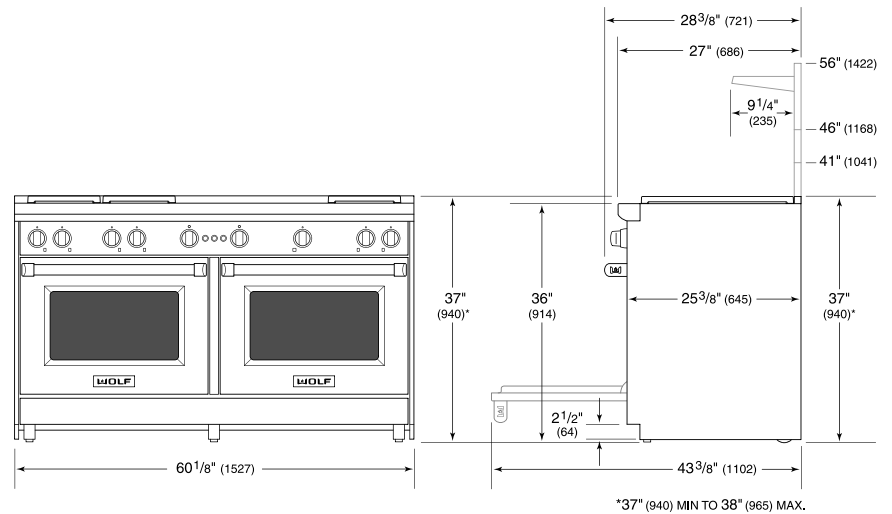

\*37" (940) MIN TO 38" (965) MAX.

**STANDARD INSTALLATION**

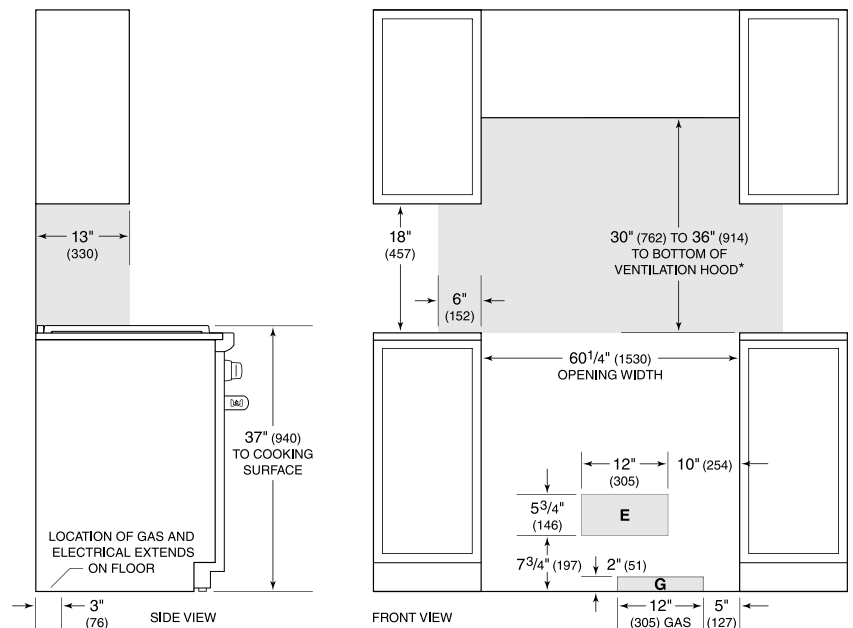

\*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler requires non-combustible materials.

**NOTE:** Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.