30" M SERIES PROFESSIONAL BUILT-IN SINGLE OVEN

SO3050PM/S/P

FEATURES

- Preheats faster and cooks more consistently across all racks due to its advanced Dual VertiFlow™ convection system
- Assures predictably delicious results with a variety of modes, including Convection Roast, Proof, and Dehydrate
- Prepares 50 popular dishes with the Gourmet feature that automatically adjusts cook times and temperatures
- Handles multiple dishes simultaneously with our largest capacity oven (13 percent larger)
- Insert a temperature probe to tell you exactly when it is done—and in Gourmet Mode, it will alert you the moment the dish is ready.
- Uncomplicate cooking with innovative, interactive color touchscreen controls
- Choose knobs in iconic red, black, brushed stainless, brushed brass, or brushed gray
- Integrates beautifully into surrounding cabinetry with flush installation
- Ensures excellent visibility via three bright halogen lights and large, triple-panel-glass door windows
- Master your technique with tips and recipes from the Mastering the M Series Oven guide

ACCESSORIES

- 30" Broiler Pan and Rack
- 30" Full-Extension Ball-Bearing Oven Rack
- 30" M Series Professional Built-In Oven Brushed Brass Bezel Kit
- 30" Multifunction Pan
- 30" Premier Baking Sheet
- 30" Standard Oven Rack
- Bake Stone Kit
- Dehydration Kit
- Dual Installation Kit
- Temperature Probe
- Red, black, brushed stainless, brushed brass, and brushed gray knob kits

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

KNOB OPTIONS

Specifications are subject to change without notice. This information was generated on October 10, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

30" M SERIES PROFESSIONAL BUILT-IN SINGLE OVEN

PRODUCT SPECIFICATIONS

Model	SO3050PM/S/P
Dimensions	29 7/8"W x 28 1/2"H x 23"D
Oven 1 Interior Dimensions	25 1/4"W x 17 1/2"H x 19 7/8"D
Overall Capacity	5.1 cu. ft.
Usable Capacity	3.3 cu. ft.
Door Clearance	21 3/8"
Electrical Supply	grounded, 240/208 VAC, 60 Hz
Electrical Service	30 amp dedicated circuit
Conduit Length	4 Feet

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

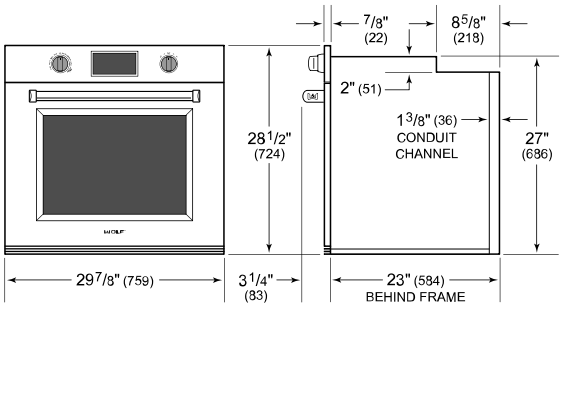

FLUSH INSTALLATION

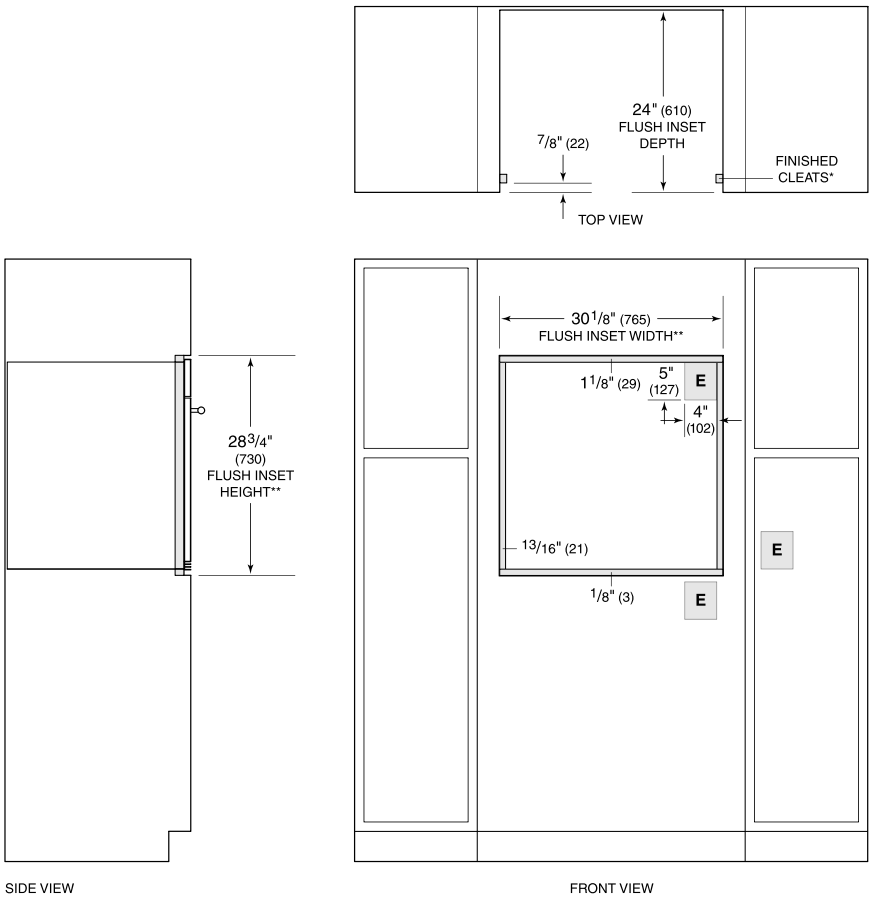

**1" (25) minimum depth. Shaded areas will be visible and should be finished to match cabinetry.*
***Dimension provides minimum reveals.*

NOTE: Location of electrical supply within opening may require additional cabinet depth.

Specifications are subject to change without notice. This information was generated on October 10, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.